


Ultra V Pro SHD L L G 7) (#B g\HŽ '(30! (50K

B	%\$, ff 3 % t
	%+&&3 %0% ('3 ' \$' ff 7, '3 '('3 1"& t
	21"\$' f(*"m t
P	%0* Z %0* fB"\$* Z "\$\$* t
	("\$' flB%(\$\$' # flB%(\$\$'
	STP-XC4 /MC4-EVO2
	-D*, ' .
	!(\$. 7 ! Z 70 . 7
	%0 \$\$ J ' 87 fl 97 t
	&) 5
	0 ~ + 3%
	fj \$ †) t
	' * #
	%&- * # % 0 "
	% 0 ") 3 % 0 (\$ \$ 3 % &)) / ' ' + - 4 /

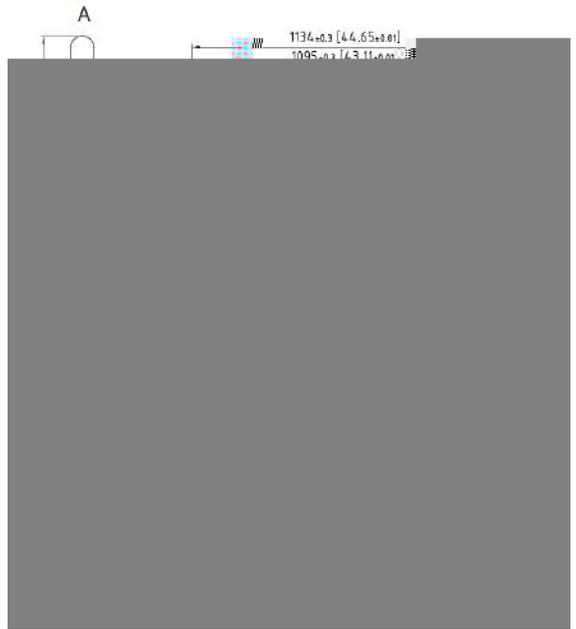

(STC)

	STP450S-C54/Nshtb+	STP445S-C54/Nshtb+	STP440S-C54/Nshtb+	STP435S-C54/Nshtb+	STP430S-C54/Nshtb+
(Pmax/W)	450	445	440	435	430
(Vmp/V)	33.04	32.87	32.69	32.51	32.33
(Imp/A)	13.62	13.54	13.46	13.38	13.30
(Voc/V)	39.24	39.11	38.98	38.85	38.72
(Isc/A)	14.57	14.49	14.41	14.33	14.25
(%)	23.0	22.8	22.5	22.3	22.0

GH7. %\$\$K #a z2 &) z5A 1%) / Z# ' i /

(BNPI)

	499	493	488	482	476
(Pmax/W)	499	493	488	482	476
(Vmp/V)	33.00	32.80	32.60	32.40	32.20
(Imp/A)	15.12	15.03	14.97	14.88	14.78
(Voc/V)	39.45	39.32	39.19	39.06	38.93
(Isc/A)	16.14	16.05	15.97	15.88	15.79

BNPI: 正面辐照度1000 W/m², 背面辐照度135 W/m², 组件温度25 °C, AM=1.5;

! / ! (35K

fDa Ul t	! "\$&- i #. 7
fj c Vt	! "\$&) i #. 7
fI g Vt	\$" \$ (* i #. 7

