




# Ultra V Pro STPXXXS-H54-Nfb+ 490-510W

N
108 (6 × 18)
1961 × 1134 × 30 (77.2 × 44.6 × 1.2 )
23.5 (51.81 )
1.6 + 1.6 (0.063 + 0.063 )
4.0
(-)1400 / (+)1400
IP68 3
-40 °C - +70 °C
1500V DC (IEC)
STP-XC4 / MC4-EVO2
35 A
0 ~ + 3%
36 片/托
1224 片/17.5 米板车
1987×1120×1255 毫米/托 893 千克/托

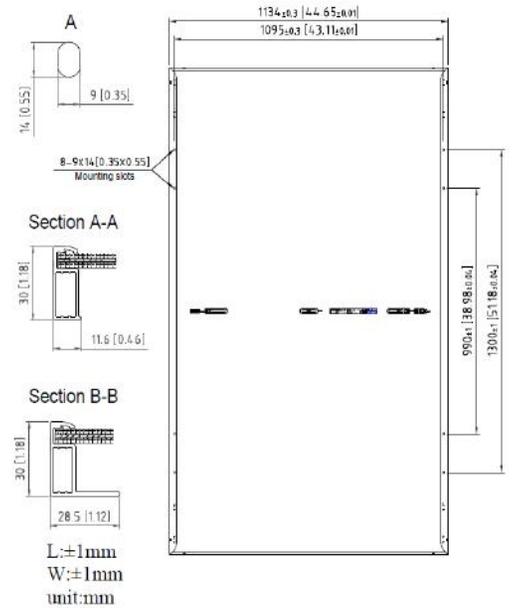

(STC)

	STP510S-H54-Nfb+	STP505S-H54-Nfb+	STP500S-H54-Nfb+	STP495S-H54-Nfb+	STP490S-H54-Nfb+
(Pmax/W)	510	505	500	495	490
(Vmp/V)	33.70	33.50	33.30	33.10	32.90
(Imp/A)	15.13	15.07	15.02	14.95	14.89
(Voc/V)	40.54	40.33	40.12	39.91	39.70
(Isc/A)	15.95	15.91	15.87	15.83	15.79
(%)	22.9	22.7	22.5	22.3	22.0

STC: 1000W/m<sup>2</sup>, 25 °C, AM=1.5; +/- 3%;

(Pmax)	-0.29%/°C
(Voc)	-0.25%/°C
(Isc)	0.046%/°C

- & - 505W

